



SUPPLIERS OF NEW & USED BOTTLING MACHINERY FOR OVER 40 YEARS

14, Crane Mead Business Park, Ware, Herts, SG12 9PZ, England Tel: 01920 484050 Fax: 01920 484050 E-mail: info@acosales.co.uk Web site: www.acosales.co.uk

Model: Inline single & three cartridge filtration system

Year : NEW







Single filter housing 3 cartridge filter housing Paper cartridges available in 0.2, 0.5, 1 & 5 micron Stainless steel cartridges available in 1, 5, 10 & 50 micron Enolsan cleaning powder





SUPPLIERS OF NEW & USED BOTTLING MACHINERY FOR OVER 40 YEARS

14, Crane Mead Business Park, Ware, Herts, SG12 9PZ, England Tel: 01920 484050 Fax: 01920 484050 E-mail: info@acosales.co.uk Web site: www.acosales.co.uk

Filters with 20x20 plates, without holes, for wine and dense SPIRITS





Pump power (kW) Plates 0,5 11		Wine production (Lt/h)	Pressure (atm)	Weight (Kg)	Dimensions (cm) 67x46x57		
		300	3	33			
0,5	21	600	3	36	67x46x57		
0,5	21	600	3	42	77x36x56		
0,5	31	900	3	43	97x46x57		
0,5	41	1200	3	53	97x46x57		
0,5	41	1200	3	58	107x36x56		

10 plate with pump

20 plate with pump

30 plate with pump

40 plate with pump

Option for with or without pump, ATEX pump and spare filter sheets.






SUPPLIERS OF NEW & USED BOTTLING MACHINERY FOR OVER 40 YEARS

14, Crane Mead Business Park, Ware, Herts, SG12 9PZ, England Tel: 01920 484050 Fax: 01920 484050 E-mail: info@acosales.co.uk Web site: www.acosales.co.uk

V.0 20x20 washable - refining
V.4 20X20 refining
V.8 20X20 clarifier
V.12 20X20 haze remover
V.16 20X20 haze remover ultra
V.18 20X20 semi-steriliser
V.20 20X20 steriliser
V.24 20X20 perfect steriliser
E.2 20X20for oil
MOPLEN 20X20 CENTRAL PLATE
MOPLEN DX (RIGHT) 20X20 END PLATE
MOPLEN SX (LEFT) 20X20 END PLATE
NORYL 20X20 CENTRAL PLATE
NORYL DX (RIGHT) 20X20 END PLATE
NORYL SX (LEFT) 20X20 END PLATE
PLATES GASKET 20X20 2 mm thickness
PLATES GASKET 20X20 4 mm thickness
PLATES GASKET 20X20 5 mm thickness



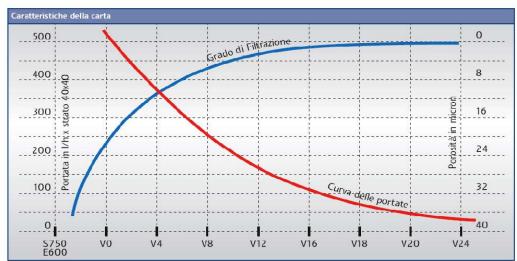

Caratteristiche della carta	unità	VO	V4	V8	V12	V16	V18	V20	V24
Grammatura	g/m²	880	875	1020	1080	1150	1200	1250	1250
Spessore	mm	3,35	3,40	3,40	3,40	3,40	3,40	3,40	3,40
Grado di filtrazione nominale	micron	15-20	9-10	5-6	3-3,5	1-1,5	0,7-0,9	0,5-0,65	0,3-0,45
Portata d'acqua (0,2 bar, 20°C)	I/min/m²	>400	>350	>120	>40	>12	>10	>7	>3